



P&O Driver Safety Standards




Personal Protective Equipment

- The Seven items of PPE that every driver should have:




Strap Condition

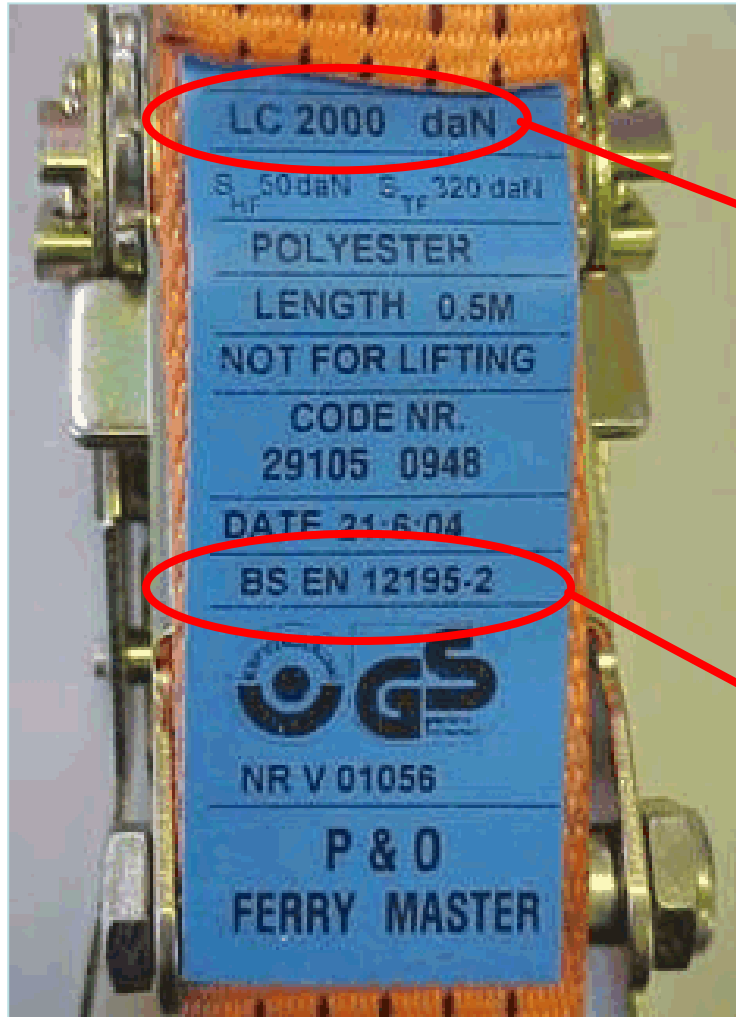

Lashing Capacity
2000 daN – This is
2ton of Force NOT
Weight!

Must comply to
EN 12195-2

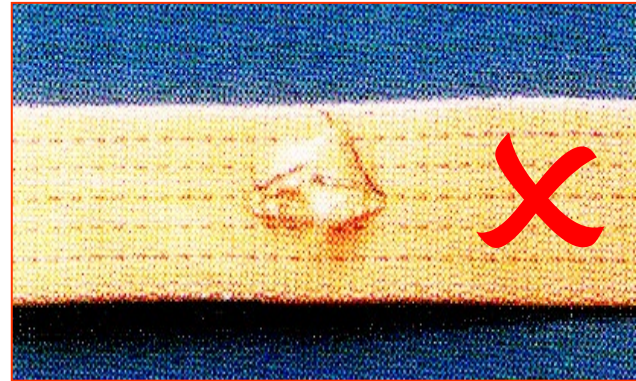

The webbing has been cut across its width by a sharp edge. This type of damage will result in substantial loss of strength.

ACTION:
REMOVE FROM SERVICE



The webbing has been cut and has a frayed edge. This will weaken the webbing substantially

ACTION:
REMOVE FROM SERVICE



Knotted webbing should not be used. A cut lashing should not be joined by knotting.

ACTION:
REMOVE FROM SERVICE

Tractor Unit Standards



Park brake **ON**



Ignition **OFF**




Key **OUT**




Trailer park brakes



Trailer Standards

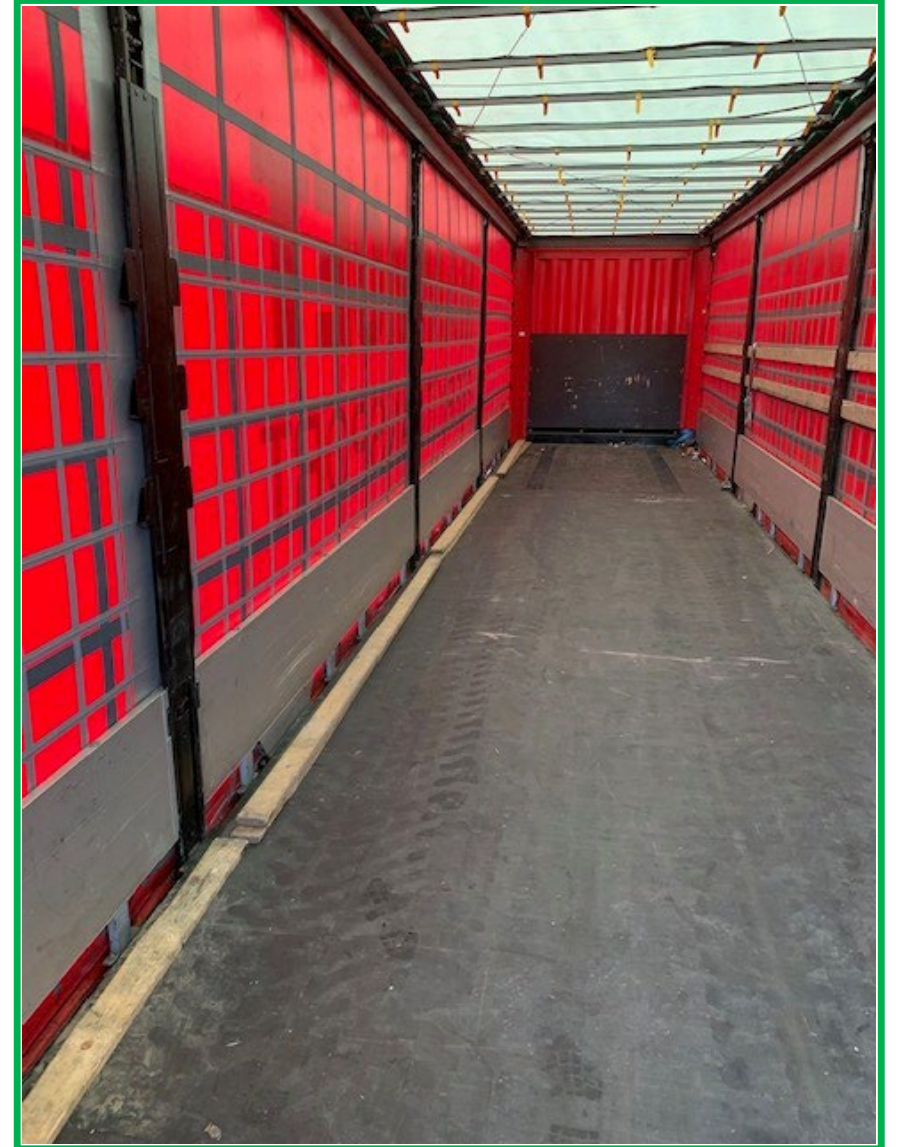


Equipment Standards - Use roof pole

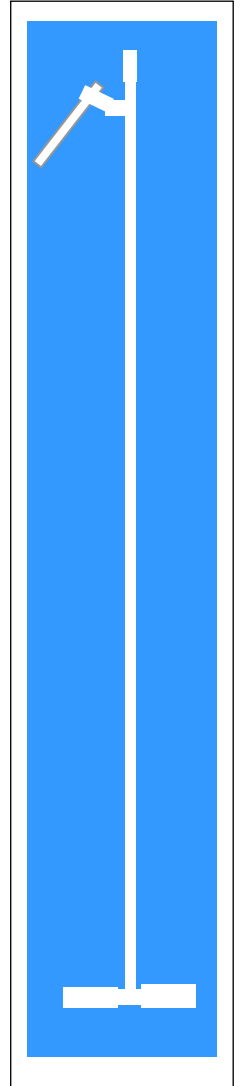

No Climbing!!



Driver Safe Zones

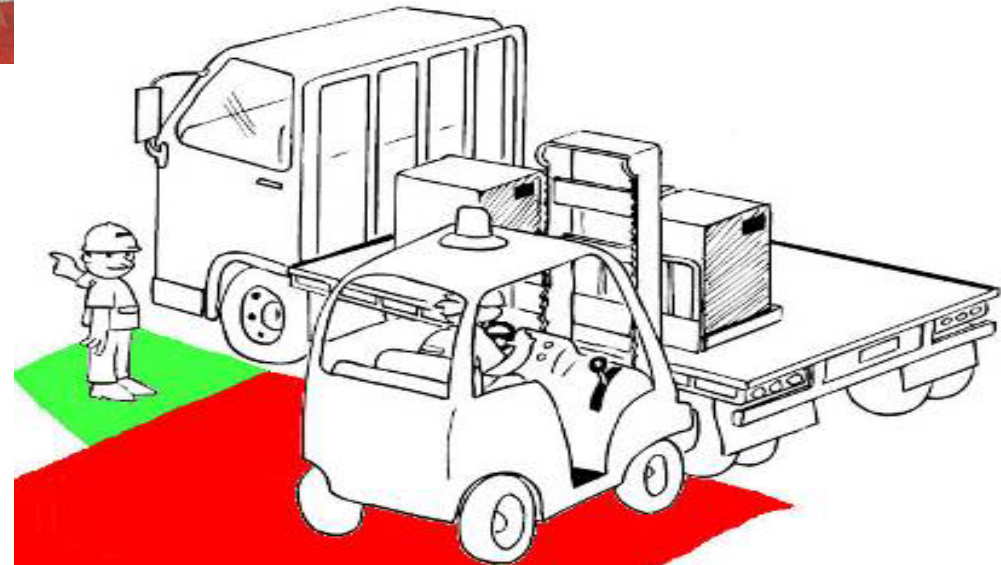

Be kind, courteous and polite at all times!



The background of the image is a close-up of a flag with four distinct colors: blue, white, red, and yellow. The flag is shown in a wavy, draped manner, creating a sense of movement. The colors are arranged in a way that they overlap and flow together. The blue section is on the left, the white section is at the top, the red section is on the right, and the yellow section is at the bottom. The texture of the flag material is visible, showing a fine, woven pattern.

END